




© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

## 2206 K 2RS TNG-NSK SFÆRISK KUGLELEJE MED GUMMITÆTNINGER OG KONISK HUL

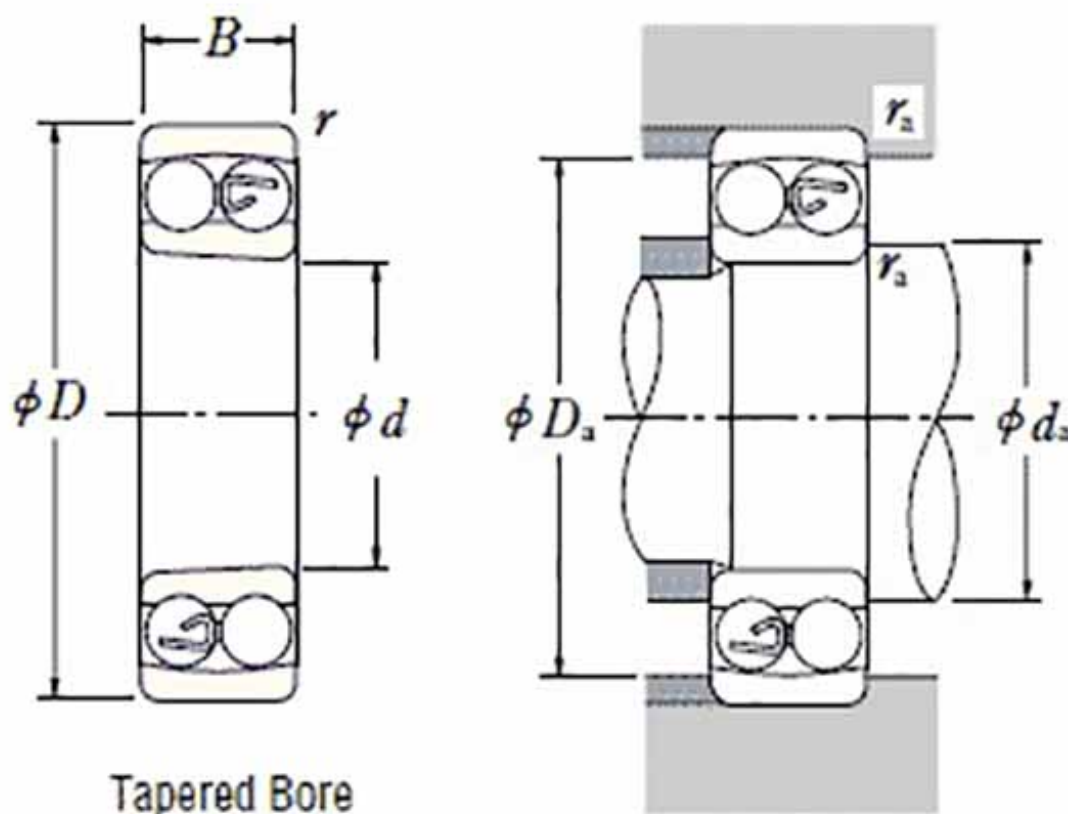

Self aligning ball bearing with tapered bore and rubber seals from the world leader NSK, the worlds largest ball bearing manufacturer offering unparalleled quality

### Basic dimensions

|                    |       |    |
|--------------------|-------|----|
| Width [B]          | 20.00 | mm |
| Inner diameter [d] | 30.00 | mm |
| Outer diameter [D] | 62.00 | mm |

### Physical properties

|                             |           |     |
|-----------------------------|-----------|-----|
| Load Radial Static [C0r]    | 4 550.00  | n   |
| Load Radial Dynamic [Cr]    | 15 300.00 | n   |
| Weight                      | 0.25      | kg  |
| Load rating static [C0r]    | 4 550.00  | n   |
| Limiting speed oil [rpm]    | 12 000.00 | rpm |
| Load rating dynamic [Cr]    | 15 300.00 | n   |
| Limiting speed grease [rpm] | 10 000.00 | rpm |

## Other data

|                              |           |    |
|------------------------------|-----------|----|
| Ref diam shaft min [da min]  | 35.00     | mm |
| Ref diam groove max [Da max] | 57.00     | mm |
| Cage Type                    | Polyamide |    |
| Seal type                    | 2RS       |    |
| Radius min [r min]           | 1.00      | mm |
| Bore type                    | Tapered   |    |