



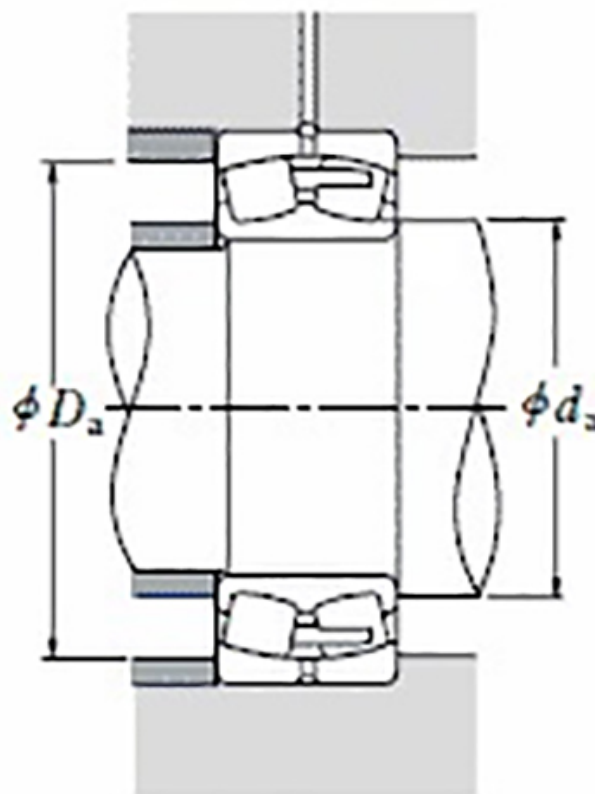

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

23040 K EM W33 C3-TIMKEN SFÆRISK RULLELEJE MED KONISK HUL

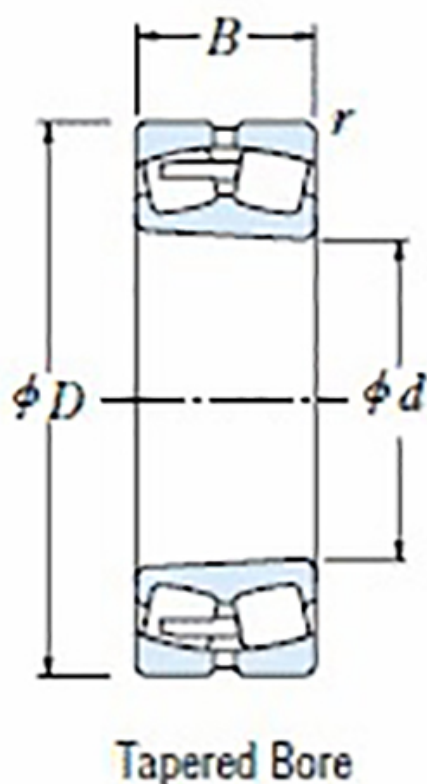

High quality spherical roller bearing with tapered bore from TIMKEN, a world leader in roller bearing technology. TIMKEN spherical roller bearings feature high class materials, innovative cage designs, enhanced surface finishes allowing better lubricant distribution and higher load ratings leading up to lower operating temperatures and longer service life

Basic dimensions

Inner diameter [d]	200.00	mm
Outer diameter [D]	310.00	mm
Width [B]	82.00	mm

Physical properties

Limiting speed oil [rpm]	1 800.00	rpm
Load rating dynamic [Cr]	1 230 000.00	n
Limiting speed grease [rpm]	1 500.00	rpm
Load rating static [C0r]	1 760 000.00	n

Other data

Ref diam groove max [Da max]	289.00	mm
Bore type	Tapered	
Cage Type	EM	
Clearance	C3	
Ref diam shaft min [da min]	225.00	mm