order@nomo.se | +45 44 20 86 00 | https:nomo.dk

62/28 DU C3-NSK SPORKUGLELEJE ENRADET MED EN GUMMITÆTNING

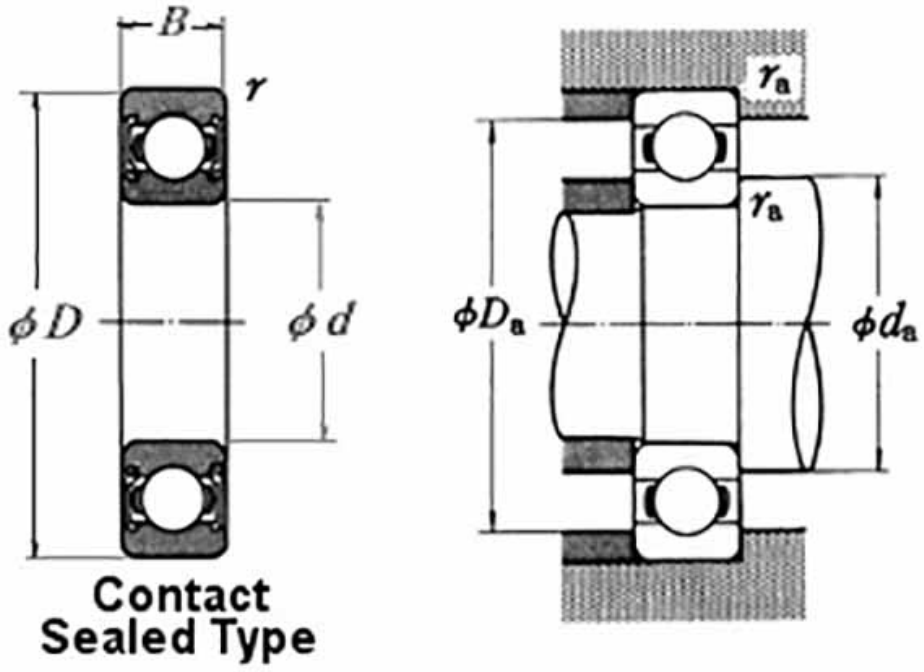

High quality Deep groove ball bearing with contact rubber seal on one side from the world leader NSK, the worlds largest ball bearing manufacturer offering unparalelled quality. The unique & patented NSK DDU rubber seal features market leading technology, keeping contaminants and moisture out of the bearing while retaining the high class lubricant inside

Basic dimensions

Outer diameter [D]	58.00	mm
Width [B]	16.00	mm
Inner diameter [d]	28.00	mm

Physical properties

Load rating dynamic [Cr]	16 600.00	n

Load rating static [C0r]	9 500.00	n
Load rating dynamic kgf	1 700.00	
Limiting speed oil [rpm]	14 000.00	rpm
Load rating static kgf	970.00	
Limiting speed grease [rpm]	12 000.00	rpm
Weight	0.18	kg

Other data

Factor	13.90	
Seal type	Contact Sealded RS	
Ref diam groove max [Da max]	53.00	mm
Radius min [r min]	1.00	mm
Ref rad max [ra max]	1.00	mm
Ref diam shaft max	35.50	mm
Clearance	C3	
Ref diam shaft min [da min]	33.00	mm

Other

factor	13.90	mm
factor	13.90	