




order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

## 6206 2RS NR C3-NSK SPORKUGLELEJE MED GUMMITÆTNINGER OG LÅSERING

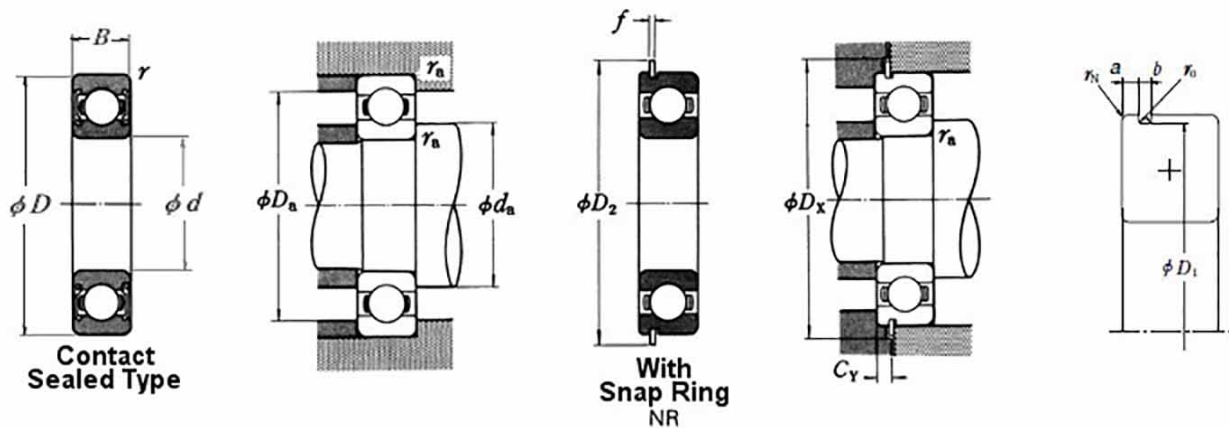

High quality Deep groove ball bearing with locating snap ring on the outer diameter and rubber contact seals from the world leader NSK, the worlds largest ball bearing manufacturer offering unparalleled quality. The unique & patented NSK DDU rubber seal features market leading technology, keeping contaminants and moisture out of the bearing while retaining the high class lubricant inside

### Basic dimensions

|                    |       |    |
|--------------------|-------|----|
| Inner diameter [d] | 30.00 | mm |
| Width [B]          | 16.00 | mm |
| Outer diameter [D] | 62.00 | mm |

### Physical properties

|                             |           |     |
|-----------------------------|-----------|-----|
| Load rating static [C0r]    | 11 300.00 | n   |
| Weight                      | 0.20      | kg  |
| Load rating static kgf      | 1 150.00  |     |
| Limiting speed grease [rpm] | 7 500.00  | rpm |
| Load rating dynamic kgf     | 1 980.00  |     |
| Load rating dynamic [Cr]    | 19 500.00 | n   |

### Other data

|                               |                    |    |
|-------------------------------|--------------------|----|
| Ref diam groove max [Da]      | 57.00              | mm |
| Thickness snap ring max [f]   | 1.70               | mm |
| Dist groove max [a]           | 3.28               | mm |
| Groove snap ring              | With Snap Ring     |    |
| Clearance                     | C3                 |    |
| Rad outer min [rN]            | 0.50               | mm |
| Factor                        | 13.80              |    |
| Width groove min [b]          | 1.90               | mm |
| Radius min [r]                | 1.00               | mm |
| Ref diam shaft min [da]       | 35.00              | mm |
| Ref diam groove [Dx]          | 68.50              | mm |
| Ref diam shaft max [da]       | 38.50              | mm |
| Diam outer snap ring max [D2] | 67.70              | mm |
| Ref dist groove [Cy]          | 4.60               | mm |
| Ref rad max [ra]              | 1.00               | mm |
| Seal type                     | Contact Sealed 2RS |    |