




order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

6209 ZZ NR-NSK SPORKUGLELEJE MED METALTÆTNINGER OG LÅSERING

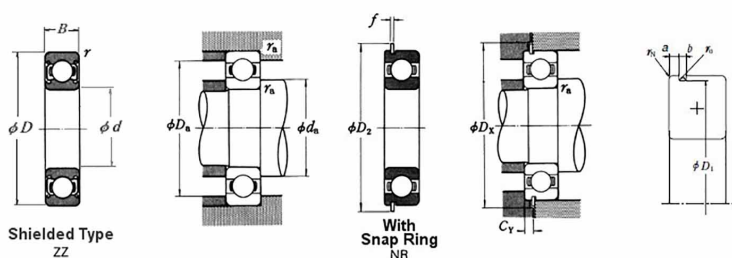

High quality steel shielded Deep groove ball bearing with locating snapping on the outer diameter from the world leader NSK, the worlds largest ball bearing manufacturer offering unparalleled quality

Basic dimensions

Width [B]	19.00	mm
Inner diameter [d]	45.00	mm
Outer diameter [D]	85.00	mm

Physical properties

Weight	0.42	kg
Load rating static [C0r]	20 400.00	n
Load rating dynamic [Cr]	31 500.00	n
Load rating static kgf	2 080.00	
Load rating dynamic kgf	3 200.00	
Limiting speed grease [rpm]	7 500.00	rpm

Other data

Radius min [r]	1.10	mm
Ref diam shaft max [da]	55.50	mm
Dist groove max [a]	3.28	mm
Diam outer snap ring max [D2]	91.60	mm

Rad outer min [rN]	0.50	mm
Ref rad max [ra]	1.00	mm
Width groove min [b]	1.90	mm
Factor	14.40	
Ref dist groove [Cy]	4.60	mm
Diam groove max [D1]	81.81	mm
Thickness snap ring max [f]	1.70	mm
Rad groove bottom max [r0]	0.60	mm
Ref diam groove max [Da]	78.50	mm
Ref diam groove [Dx]	93.00	mm
Groove snap ring	With Snap Ring	
Ref diam shaft min [da]	51.50	mm
Seal type	Two Metal Shield ZZ	