




order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

## 63/28 ZZ-NSK SPORKUGLELEJE ENRADET MED METALTÆTNINGER

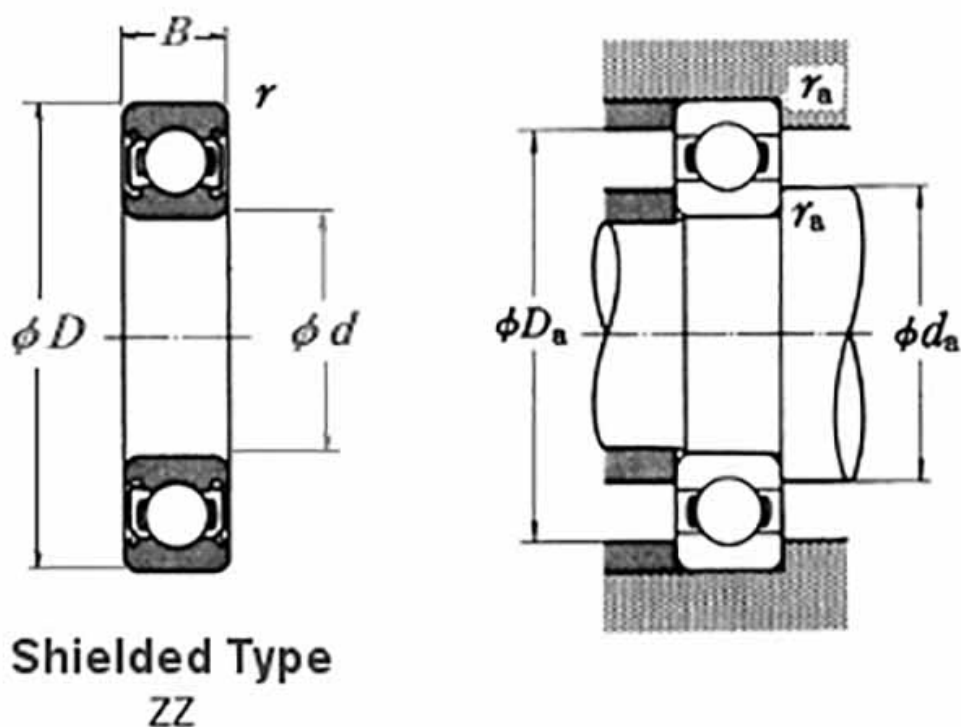

High quality steel shielded Deep groove ball bearing from the world leader NSK, the worlds largest ball bearing manufacturer offering unparalleled quality

### Basic dimensions

|                    |       |    |
|--------------------|-------|----|
| Outer diameter [D] | 68.00 | mm |
| Width [B]          | 18.00 | mm |
| Inner diameter [d] | 28.00 | mm |

### Physical properties

|                          |           |   |
|--------------------------|-----------|---|
| Load rating dynamic [Cr] | 26 700.00 | n |
| Load rating static [COr] | 14 000.00 | n |

|                             |           |     |
|-----------------------------|-----------|-----|
| Load rating dynamic kgf     | 2 730.00  |     |
| Load rating static kgf      | 1 430.00  |     |
| Limiting speed grease [rpm] | 10 000.00 | rpm |
| Weight                      | 0.29      | kg  |

## Other data

|                              |                     |    |
|------------------------------|---------------------|----|
| Factor                       | 12.40               |    |
| Seal type                    | Two Metal Shield ZZ |    |
| Ref diam groove max [Da max] | 61.50               | mm |
| Radius min [r min]           | 1.10                | mm |
| Ref rad max [ra max]         | 1.00                | mm |
| Ref diam shaft max           | 38.00               | mm |
| Ref diam shaft min [da min]  | 34.50               | mm |

## Other

|        |       |    |
|--------|-------|----|
| factor | 12.40 | mm |
| factor | 12.40 |    |