



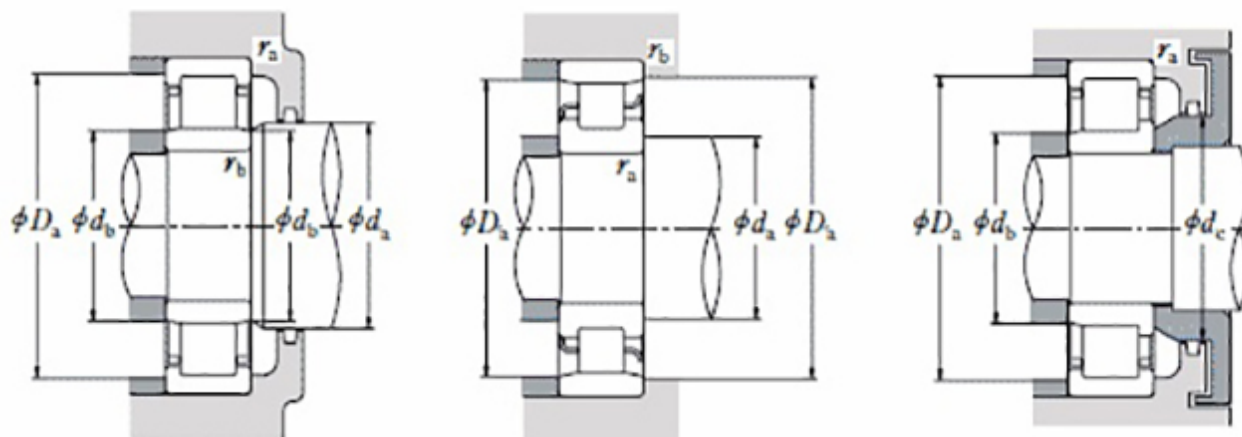

© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

NU 2214 ET C3-NSK CYLINDRISK RULLELEJE ENRADET MED POLYAMIDHOLDER

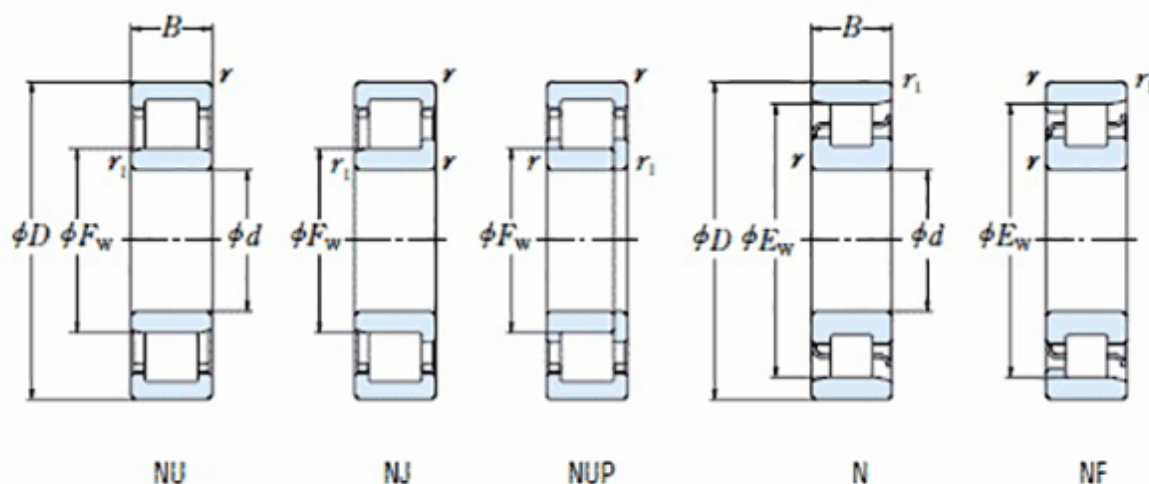

High quality cylindrical roller bearing with polyamide resin cage cage from the leading manufacturer NSK

Basic dimensions

Inner diameter [d]	70.00	mm
Width [B]	31.00	mm
Outer diameter [D]	125.00	mm
Outer diameter [D]	125.00	mm

Physical properties

Load rating static [C0r]	194 000.00	n
Limiting speed oil [rpm]	5 600.00	rpm
Limiting speed grease [rpm]	4 500.00	rpm
Load rating dynamic [Cr]	156 000.00	n

Other data

Da max	117.00	mm
db min	78.00	mm
Clearance	C3	
Design	NU	
Cage Type	Polyamide	
da	81.00	mm
Cage Material	P	
Inner ring race diameter	83.50	mm
rb max	1.50	mm
Radius min [r min]	1.50	mm
Weight	1.49	kg
ra max	1.50	mm
Radius 1 min [r1 min]	1.50	mm