



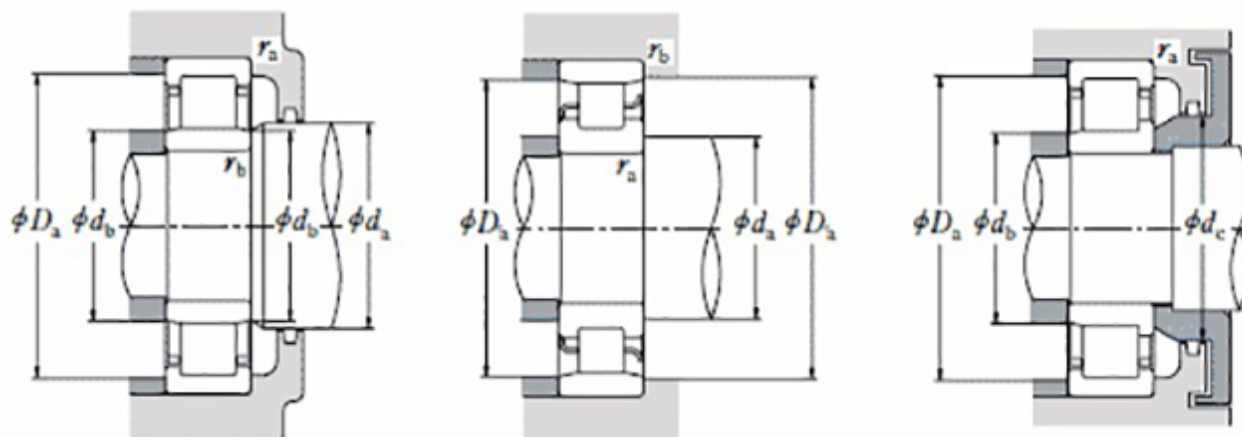

© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

NU 2306 ET-NSK CYLINDRISK RULLELEJE ENRADET MED POLYAMIDHOLDER

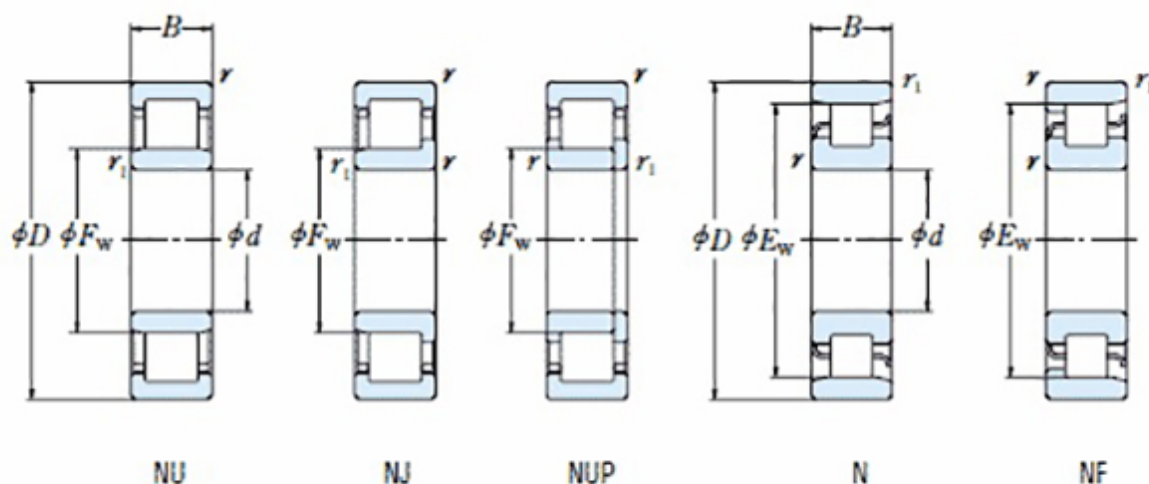

High quality cylindrical roller bearing with polyamide resin cage cage from the leading manufacturer NSK

Basic dimensions

Inner diameter [d]	30.00	mm
Width [B]	27.00	mm
Outer diameter [D]	72.00	mm
Outer diameter [D]	72.00	mm

Physical properties

Load rating static [C0r]	77 500.00	n
Limiting speed oil [rpm]	9 500.00	rpm
Limiting speed grease [rpm]	8 000.00	rpm
Load rating dynamic [Cr]	74 500.00	n

Other data

Da max	65.50	mm
Cage frequency	9 500.00	hz
db min	36.50	mm
Design	NU	
Cage Type	Polyamide	
da	39.00	mm
Cage Material	P	
Inner ring race diameter	40.50	mm
rb max	1.00	mm
Radius min [r min]	1.50	mm
Weight	0.52	kg
ra max	1.00	mm
Radius 1 min [r1 min]	1.10	mm