



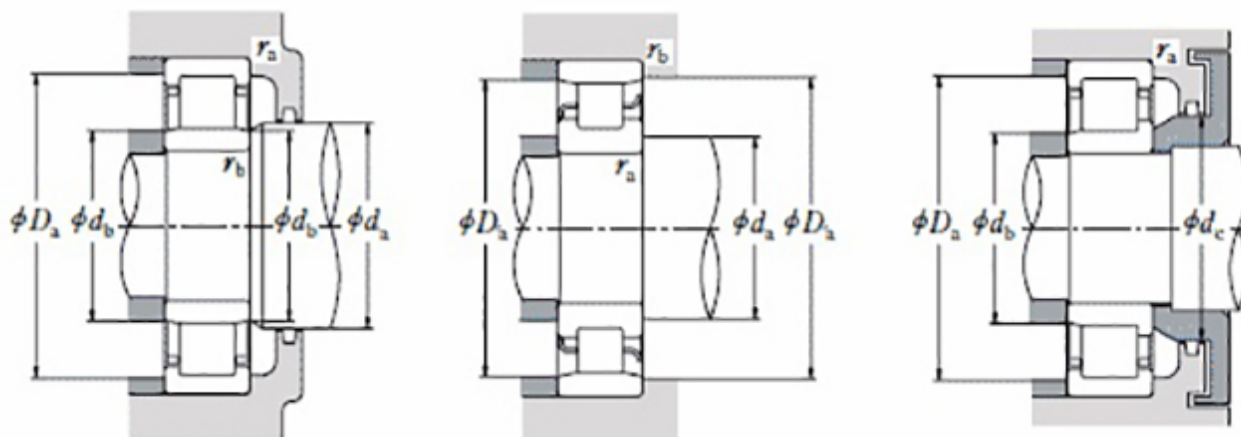

© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

NUP 2205 ET-NSK CYLINDRISK RULLELEJE ENRADET MED POLYAMIDHOLDER

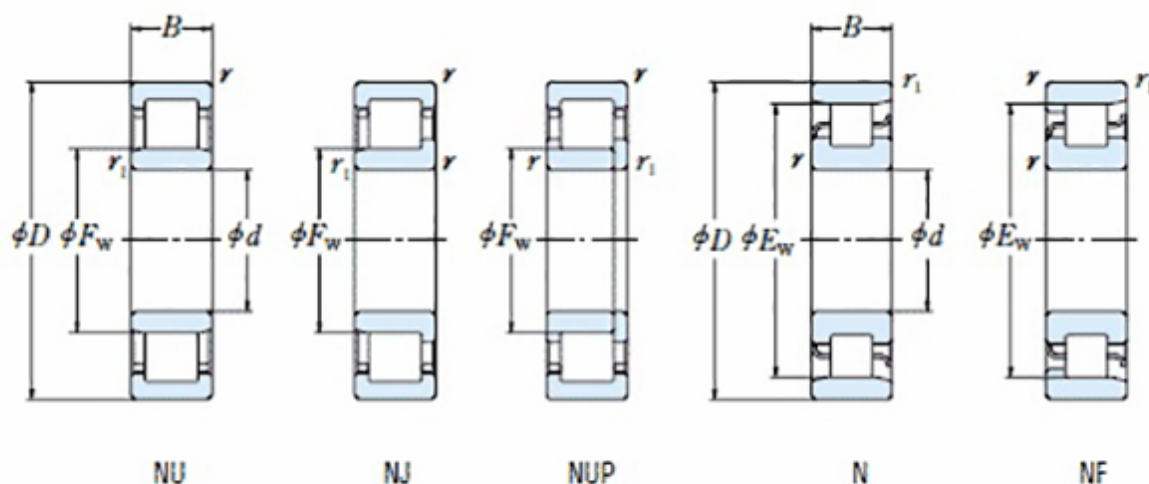

High quality cylindrical roller bearing with polyamide resin cage cage from the leading manufacturer NSK

Basic dimensions

Inner diameter [d]	25.00	mm
Width [B]	18.00	mm
Outer diameter [D]	52.00	mm
Outer diameter [D]	52.00	mm

Physical properties

Load rating static [C0r]	34 500.00	n
Limiting speed oil [rpm]	14 000.00	rpm
Limiting speed grease [rpm]	12 000.00	rpm
Load rating dynamic [Cr]	35 000.00	n

Other data

Da max	47.00	mm
db min	29.00	mm
Design	NUP	
Cage Type	Polyamide	
da	30.00	mm
Cage Material	P	
Inner ring race diameter	31.50	mm
rb max	0.60	mm
Radius min [r min]	1.00	mm
Weight	0.16	kg
ra max	1.00	mm
Radius 1 min [r1 min]	0.60	mm