



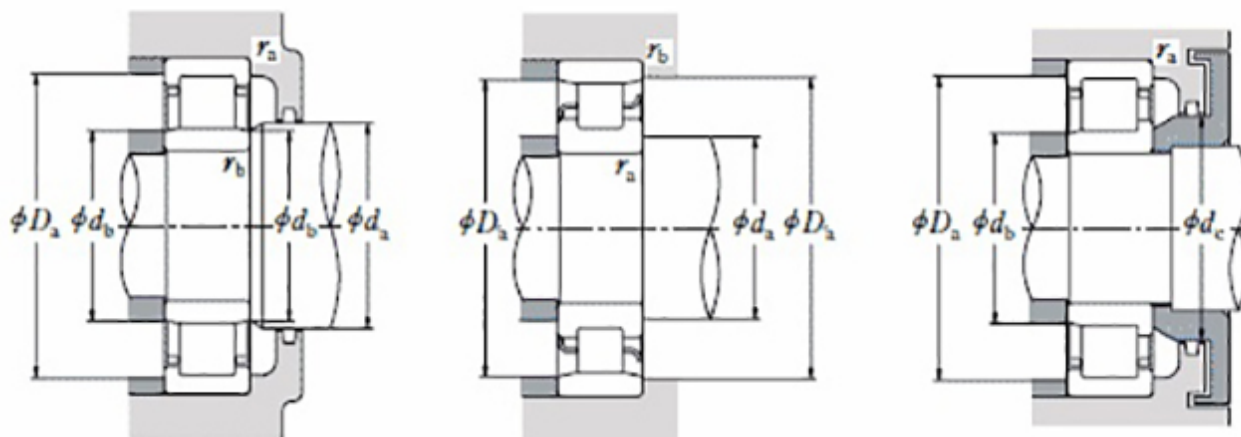

© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

NUP 2217 ET-NSK CYLINDRISK RULLELEJE ENRADET MED POLYAMIDHOLDER

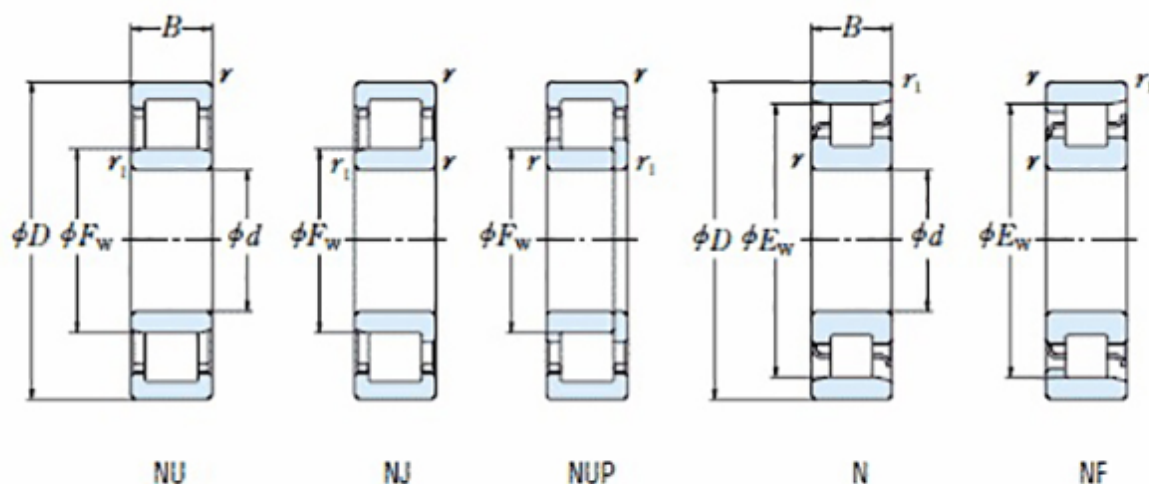

High quality cylindrical roller bearing with polyamide resin cage cage from the leading manufacturer NSK

Basic dimensions

Inner diameter [d]	85.00	mm
Width [B]	36.00	mm
Outer diameter [D]	150.00	mm
Outer diameter [D]	150.00	mm

Physical properties

Load rating static [C0r]	279 000.00	n
Limiting speed oil [rpm]	4 500.00	rpm
Limiting speed grease [rpm]	3 800.00	rpm
Load rating dynamic [Cr]	217 000.00	n

Other data

Da max	141.00	mm
db min	94.00	mm
Design	NUP	
Cage Type	Polyamide	
da	98.00	mm
Cage Material	P	
Inner ring race diameter	100.50	mm
rb max	2.00	mm
Radius min [r min]	1.10	mm
Weight	2.44	kg
ra max	2.00	mm
Radius 1 min [r1 min]	1.10	mm