



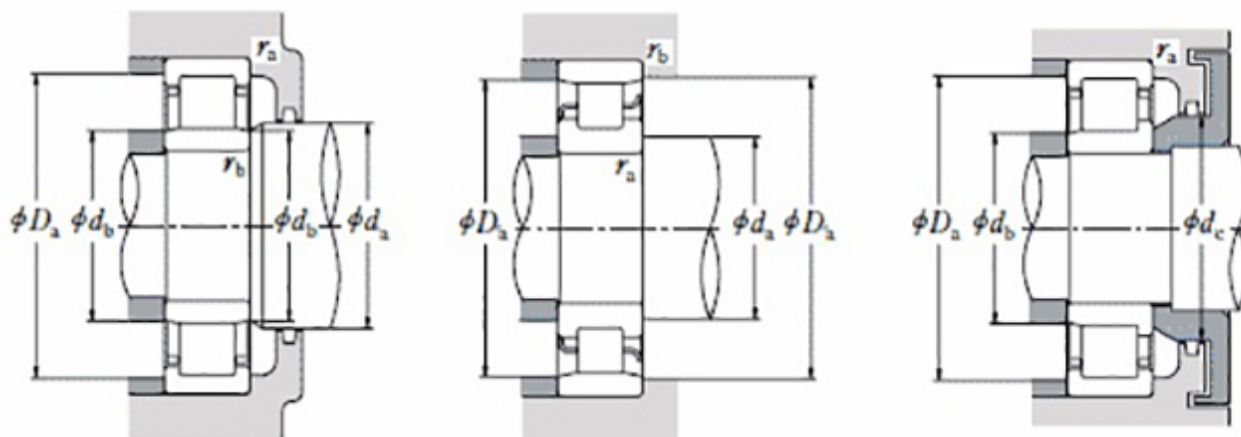

© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

NUP 308 EW-NSK CYLINDRISK RULLELEJE ENRADET MED STÅLHOLDER

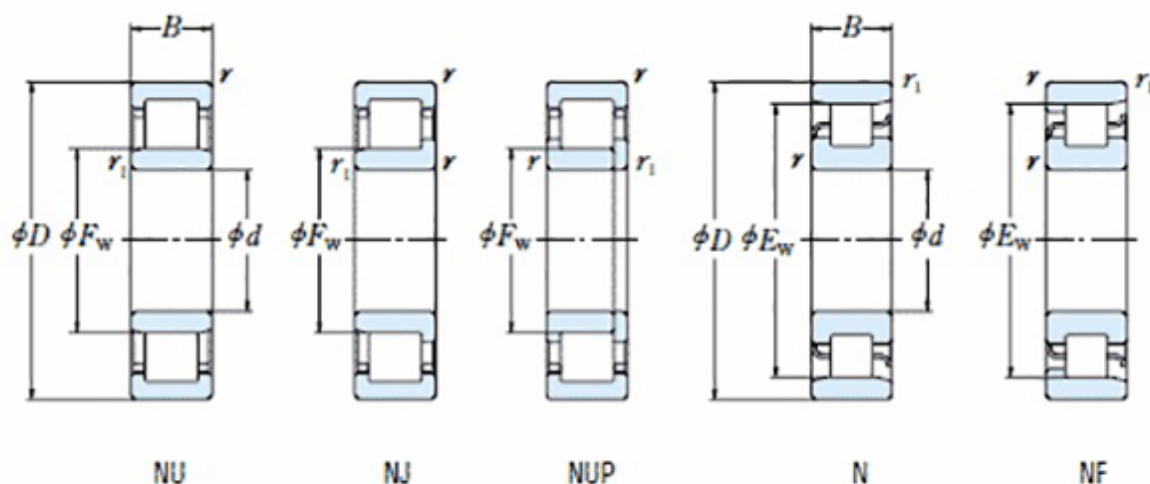

High quality cylindrical roller bearing with pressed steel cage cage from the leading manufacturer NSK

Basic dimensions

Inner diameter [d]	40.00	mm
Width [B]	23.00	mm
Outer diameter [D]	90.00	mm
Outer diameter [D]	90.00	mm

Physical properties

Load rating static [C0r]	81 500.00	n
Limiting speed oil [rpm]	8 000.00	rpm
Limiting speed grease [rpm]	6 700.00	rpm
Load rating dynamic [Cr]	83 000.00	n

Other data

Da max	82.00	mm
db min	48.00	mm
Design	NUP	
Cage Type	Steel	
da	50.00	mm
Cage Material	S	
Inner ring race diameter	52.00	mm
rb max	1.50	mm
Radius min [r min]	1.50	mm
Weight	0.75	kg
ra max	1.50	mm
Radius 1 min [r1 min]	1.50	mm