



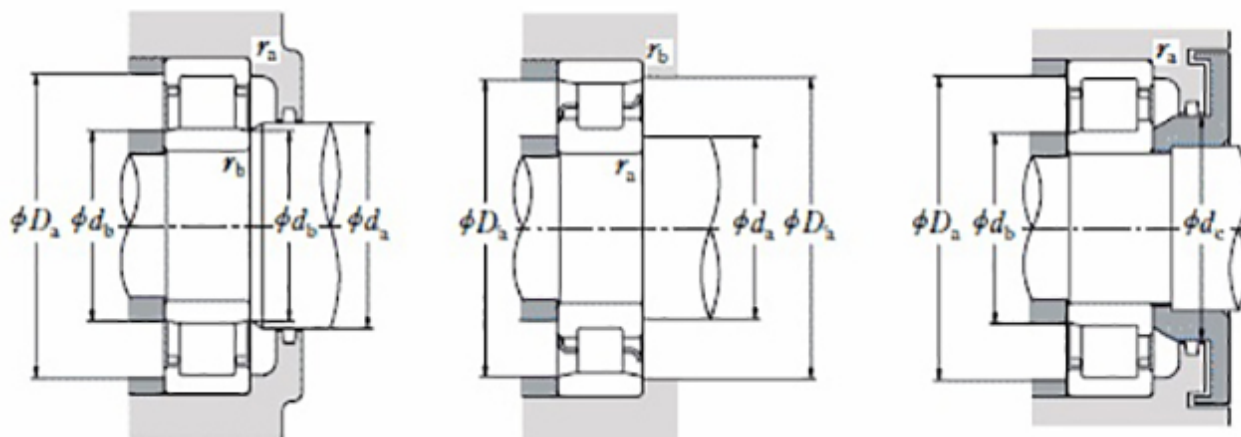

© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

NUP 309 EW-NSK CYLINDRISK RULLELEJE ENRADET MED STÅLHOLDER

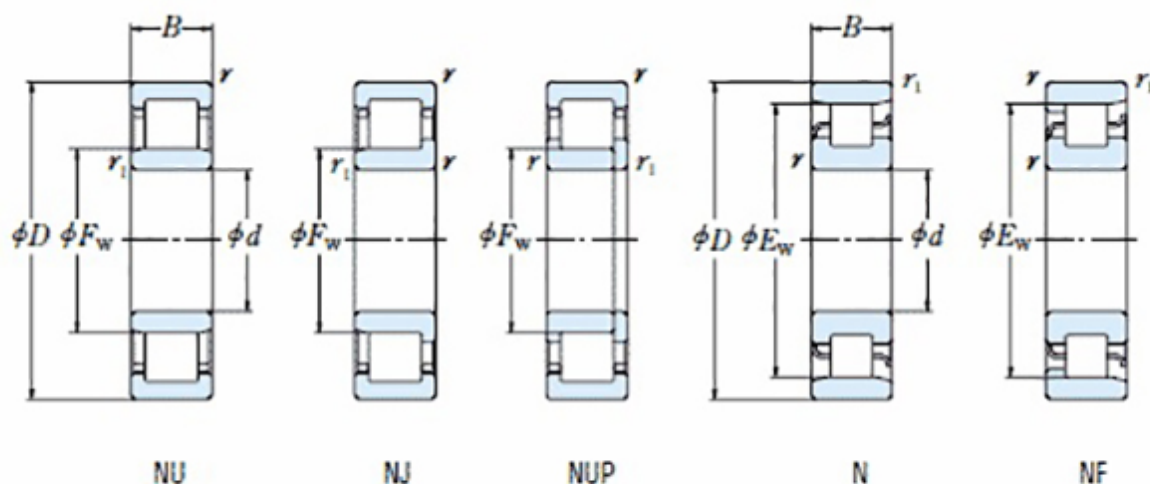

High quality cylindrical roller bearing with pressed steel cage cage from the leading manufacturer NSK

Basic dimensions

Inner diameter [d]	45.00	mm
Width [B]	25.00	mm
Outer diameter [D]	100.00	mm
Outer diameter [D]	100.00	mm

Physical properties

Load rating static [C ₀ r]	98 500.00	n
Limiting speed oil [rpm]	7 500.00	rpm
Limiting speed grease [rpm]	6 000.00	rpm
Load rating dynamic [C _r]	97 500.00	n

Other data

Da max	92.00	mm
db min	53.00	mm
Design	NUP	
Cage Type	Steel	
da	56.00	mm
Cage Material	S	
Inner ring race diameter	58.50	mm
rb max	1.50	mm
Radius min [r min]	2.10	mm
Weight	1.01	kg
ra max	1.50	mm
Radius 1 min [r1 min]	2.10	mm