




order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

## VA 25 NBR V-RING VA 25 NBR

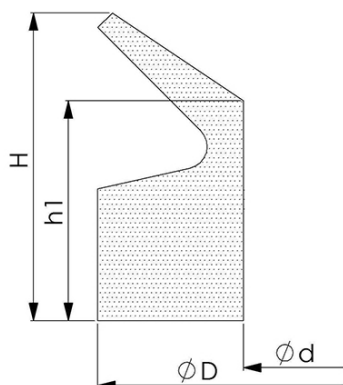

### Basic dimensions

|        |       |    |
|--------|-------|----|
| d      | 22.00 | mm |
| d1 max | 27.00 | mm |
| D1 min | 24.00 | mm |

### Physical properties

|               |          |     |
|---------------|----------|-----|
| Material      | 0.00     |     |
| Cross-section | 0.00     |     |
| Max. speed    | 2 240.00 | rpm |

### Other data

|            |        |    |
|------------|--------|----|
| Temp. High | 100.00 |    |
| A          | 4.70   | mm |
| c          | 4.00   | mm |
| d2         | 0.00   | mm |
| d3         | 0.00   | mm |

|           |        |    |
|-----------|--------|----|
| B1        | 6.00   | mm |
| B         | 7.50   | mm |
| Temp. Low | -30.00 |    |