




© Nomo Group

order@nomo.se | +45 44 20 86 00 | <https://nomo.dk>

## NJ 2218 W C3-NSK CYLINDRISK RULLELEJE ENRADET MED STÅLHOLDER

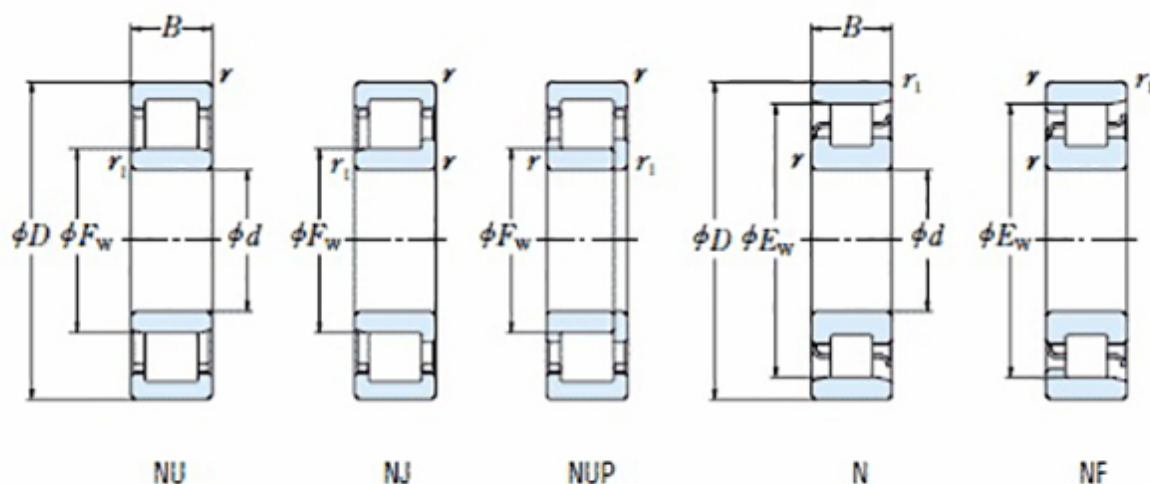

High quality cylindrical roller bearing with pressed steel cage cage from the leading manufacturer NSK

### Basic dimensions

|                    |        |    |
|--------------------|--------|----|
| Inner diameter [d] | 90.00  | mm |
| Width [B]          | 40.00  | mm |
| Outer diameter [D] | 160.00 | mm |
| Outer diameter [D] | 160.00 | mm |

### Physical properties

|                             |            |     |
|-----------------------------|------------|-----|
| Load rating static [C0r]    | 315 000.00 | n   |
| Limiting speed oil [rpm]    | 4 300.00   | rpm |
| Limiting speed grease [rpm] | 3 600.00   | rpm |
| Load rating dynamic [Cr]    | 242 000.00 | n   |

## Other data

|                          |        |    |
|--------------------------|--------|----|
| Da max                   | 151.00 | mm |
| db min                   | 99.00  | mm |
| Clearance                | C3     |    |
| Design                   | NJ     |    |
| Cage Type                | Steel  |    |
| da                       | 104.00 | mm |
| Cage Material            | S      |    |
| Inner ring race diameter | 107.00 | mm |
| Radius min [r min]       | 2.10   | mm |
| Weight                   | 3.11   | kg |
| ra max                   | 2.00   | mm |
| Radius 1 min [r1 min]    | 2.10   | mm |